




Disassembling Toshiba Satellite L775-18H Ventilateur

Remove and clean the ventilateur


Written By: Duysinx

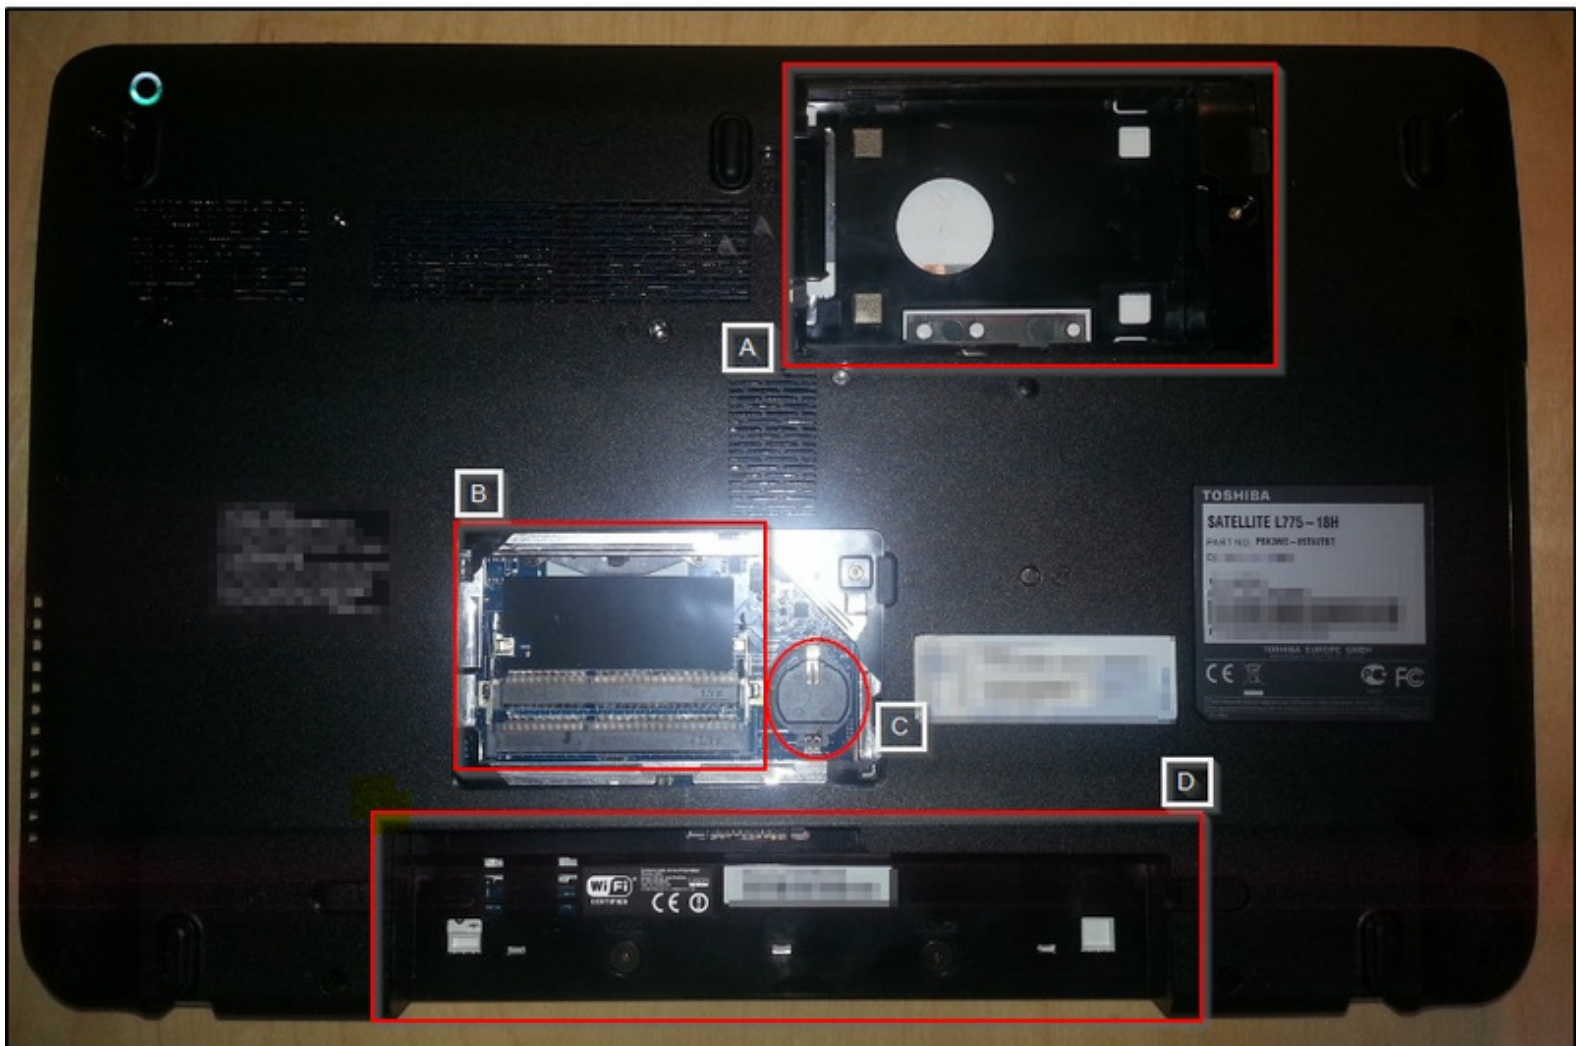

INTRODUCTION

Remove and clean the ventilateur

Step 1 — Prerequisites before starting

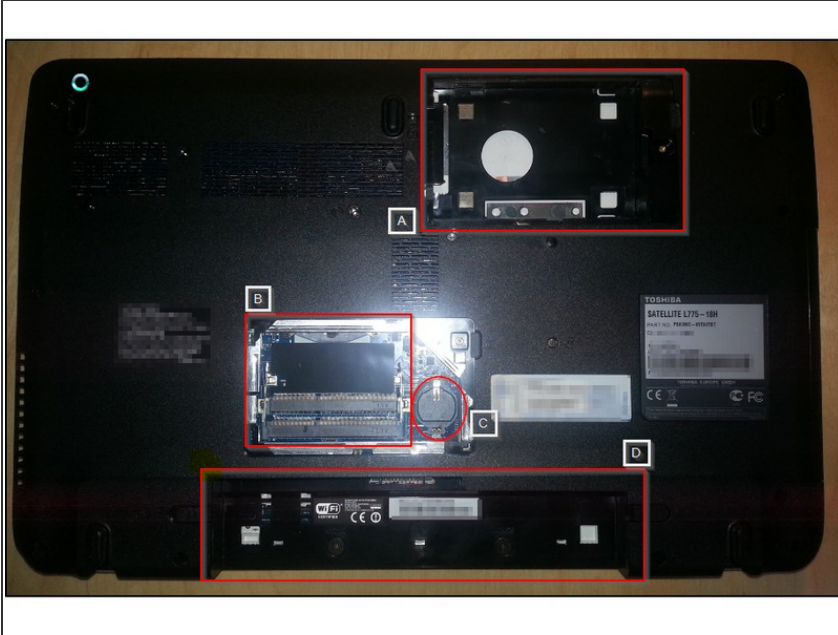

- The machine is not connected to the mains;
- The hard drive was removed (A);
- The RAM modules are removed (B);
- The bios of the battery is removed (C);
- The battery is removed (D).

Step 2 — Disassemble the keyboard wedge cache



- Position the computer keyboard and screen open face
- Using a spoon gently lift the plastic tab starting from the left

Step 3 — Unscrew



- Insert comment.

Pour réassembler votre appareil, suivez les instructions dans l'ordre inverse.

This document was last generated on 2017-06-19 12:41:11 AM.